


## Stainless Steel Pump Connectors

### Standard Features:

- Constructed of stainless steel annular corrugated metal surrounded with a woven wire braid of high tensile stainless steel
- High pressure and temperature capabilities
- Absorbs pump vibration and noise
- Reduces piping stress due to minor misalignment and pressure variations

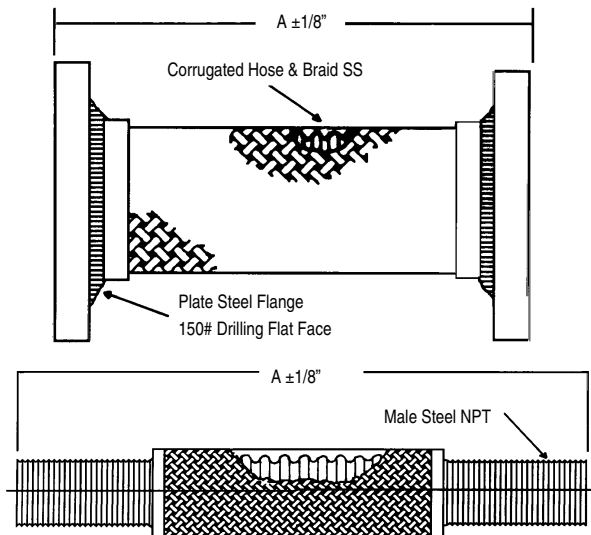

\*Ratings for constant pressures. Use 1/2 of ratings for pulsating pressures and 1/6 of ratings for surge pressures.

### For Temperatures Above 70°F

For safe working pressures above 70°F, multiply pressure shown at 70°F by correction factor of required temperature.

### Correction Factors

Temperature °F	Factor
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

### Dimensions

Model No.	Pipe Size x Length (A)	Pressure @ 70°F*
<b>Mini Length: Flanged Ends</b>		
FLXCON-002	2 x 9	350
FLXCON-025	2 1/2 x 9	275
FLXCON-003	3 x 9	275
FLXCON-004	4 x 9	230
FLXCON-005	5 x 11	265
FLXCON-006	6 x 11	240
FLXCON-008	8 x 12	185
FLXCON-010	10 x 13	165
FLXCON-012	12 x 14	155
FLXCON-014	14 x 14	150
<b>Long Length: Flanged Ends</b>		
FLXCON-002EL	2 x 10	350
FLXCON-025EL	2 1/2 x 10 1/4	275
FLXCON-003EL	3 x 10 5/8	275
FLXCON-004EL	4 x 11 3/4	230
FLXCON-005EL	5 x 13 5/8	265
FLXCON-006EL	6 x 14 1/8	240
FLXCON-008EL	8 x 15 3/8	185
FLXCON-010EL	10 x 17 3/4	165
FLXCON-012EL	12 x 18 3/8	155
FLXCON-014EL	14 x 20	150
<b>Standard Length: Threaded Ends</b>		
FLXCON-050-T	1/2 x 10	750
FLXCON-075-T	3/4 x 10	750
FLXCON-001-T	1 x 10	650
FLXCON-125-T	1 1/4 x 10	550
FLXCON-150-T	1 1/2 x 10	500
FLXCON-002-T	2 x 14	475
FLXCON-250-T	2 1/2 x 16	375
FLXCON-003-T	3 x 16	325

JOB NAME \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 CONTRACTOR P.O. NO. \_\_\_\_\_

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____