


ASME Relief Valve

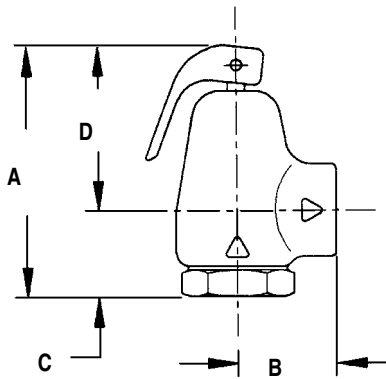

Features:

- Relieves pressure in hot water heating systems
- Eight available pressure settings as listed below. Please specify with order.
- Test lever standard on all models
- ASME listed, rated and stamped
- Bronze body, heat resistant silicone seat disc, stainless steel springs and NPT end connections

ASME Relief Capacities at Standard Settings—BTU/hr. Steam Relief

| Setting | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
|---------|-----------|-----------|-----------|-----------|------------|
| 30 PSI | 717,400 | 1,025,000 | 1,704,000 | 2,085,000 | 3,902,000 |
| 35 PSI | 800,100 | 1,143,000 | 1,900,000 | 2,325,000 | 4,352,000 |
| 45 PSI | 965,600 | 1,380,000 | 2,293,000 | 2,806,000 | 5,252,000 |
| 50 PSI | 1,048,300 | 1,498,000 | 2,490,000 | 3,047,000 | 5,701,000 |
| 75 PSI | 1,461,900 | 2,090,000 | 3,472,000 | 4,249,000 | 7,951,000 |
| 100 PSI | 1,875,500 | 2,680,000 | 4,454,000 | 5,451,000 | 10,200,000 |
| 125 PSI | 2,289,100 | 3,271,000 | 5,437,000 | 6,653,000 | 12,450,000 |
| 150 PSI | 2,702,700 | 3,862,000 | 6,419,000 | 7,855,000 | 14,700,000 |

Dimensional Data:

| Model | Size | A | B | C | D | Weight (lbs.) |
|--------|--------|---------|----------|--------|---------|---------------|
| RV0075 | 3/4" | 5" | 1 1/2" | 1 3/4" | 3 1/4" | 1.25 |
| RV0100 | 1" | 5 9/16" | 1 5/8" | 1 1/8" | 4 7/16" | 2.25 |
| RV0125 | 1 1/4" | 7 3/8" | 2 1/16" | 1 1/2" | 5 7/8" | 3.25 |
| RV0150 | 1 1/2" | 7 1/2" | 2 15/32" | 1 5/8" | 5 7/8" | 4.37 |
| RV0200 | 2" | 9 7/8" | 3" | 2 7/8" | 7" | 9.00 |

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

| ITEMS | QUANTITY |
|-------|----------|
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |



A GFP Company

932 Brookwood Drive

Columbia, SC 29201

803.343.0710

TOLL FREE 866.267.1379

FAX 803.343.0713

www.mechanicalroomsupplies.com